

2013–2016 Chevrolet Malibu 2.0L Turbo Improved Compressor Design: 6513010



Global Parts Distributors, LLC

TECH TIP


#131

gpdtechtips.com

Some compressor replacements may be designed differently from the original equipment. For example, some compressor replacements for the 2013–2016 Chevrolet Malibu (2.0L Turbo) do not include mounting bolt holes on the head of the compressor.

The 2013–2016 Malibu 2.0L Turbo is designed with a heatshield (GM #22955225) behind the compressor. Without these mounts, the heatshield cannot be used. Because of the extra heat created from the turbo engine and proximity to the exhaust manifold, this may create problems and premature failure for the A/C system.

As your “Simple A/C Solution”, gpd has consolidated OE part numbers for compressor 6513010, to suit both turbo and non-turbo engines. This gpd compressor is also designed with OE style mounting bolt holes for proper function with the heatshield.

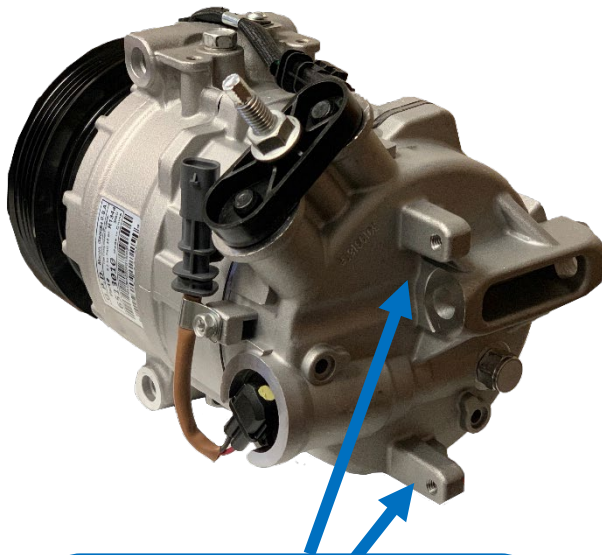

6513010
with OE Mounting Bolt Holes
for Heatshield



Competitor Design without
Mounting Bolt Holes

Manufacturer names, logos and part numbers are for reference only. All prices, taxes and availability are subject to change without notice. This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to which they are addressed. If you have received this document in error, please delete it immediately. Note that any views or opinions presented in this document are solely those of the author. Any unauthorized review, use, disclosure, or distribution is prohibited. Global Parts Distributors, LLC (gpd) accepts no liability for any damage caused by any virus or other means transmitted by this document. © Global Parts Distributors, LLC (gpd)